

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

Rec'd PCT/PTO 04 JAN 2005
PCT/SE 03 / 0 1 1 9 0

#2

REC'D 07 AUG 2003

WIPO PCT

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.


(71) Sökande Nolato AB, Torekov SE
Applicant (s)

(21) Patentansökningsnummer 0202166-5
Patent application number

(86) Ingivningsdatum 2002-07-10
Date of filing

Stockholm, 2003-08-01

För Patent- och registreringsverket
For the Patent- and Registration Office


Gunilla Larsson

Avgift
Fee

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

PATENT- OCH
REGISTRERINGSVERKET
SWEDEN

Postadress/Adress
Box 5055
S-102 42 STOCKHOLM

Telefon/Phone
+46 8 782 25 00
Vx 08-782 25 00

Telex
17978
PATOREG S

Telefax
+46 8 666 02 86
08-666 02 86

AWAPATENT AB

Kontor/Handläggare
Helsingborg/Magnus Hjerpe/MY

NOLATO AB

Ansökningsnr

Vår referens

SE-2014396

1

METHOD AND APPARATUS FOR APPLYING A COATING ON A THREE
DIMENSIONAL SURFACE

Technical field of the invention

The present invention relates to a device and a method for contactless application of a coating on a three dimensionally distributed surface.

5

Background of the Invention

Decoration or coating of products with texts and images is commonly made in a wide variety of industries. However, decoration is mostly made in two dimensions, i.e. a two dimensional decoration such as a two dimensional image is applied on a flat surface of a product. Three dimensional decoration on three dimensionally distributed surfaces of products is yet not so common.

10 In industry, the today most commonly used methods for decoration in three dimensions of medium sized products such as consumer electronics or toys with texts and images are indirect in that a decoration is first printed on a film, whereafter the film is applied on a product so that the decoration adheres to the product. These methods have some disadvantages though, of being complex, slow and expensive.

15 Some methods for printing a decoration directly on a non-planar, three dimensionally distributed surface, without first printing the decoration onto a film, have been developed.

20 In US 5 831 641 is described a method for three dimensional printing with inkjet. The idea of this method is to print on a three dimensional surface of an object by using a positioning apparatus which functions to automatically maintain the surface of the object within a plan substantially parallell to and slightly spaced apart

from the place within which the inkjet nozzles of the ink-jet plotter reside. This is a straightforward printing method, but it requires advanced positioning mechanics if the shape of the surface is complicated.

5 US 2001/0019340 A1 describes another method for three dimensional printing with inkjet. In this method, the surface of a printing object is divided into a plurality of target areas, each of which is then approximated by a two dimensional projective plane. An
10 inkjet printhead then prints a projected part image on each target area while moving in parallel with the projective planes. This method decreases the need for positioning mechanics, but introduces the problem with image deterioration owing to the inclination of the
15 object surface in relation to the projective planes and the printhead.

A today conventional inkjet printing system for printing on a two dimensional surface is described in US 4 695 848. According to this document, a drop generator
20 generates ink droplets, which are first charged and then deflected by means of a pair of electrodes positioned on either side of the path followed by the droplets. The deflection is used in order to cover e.g. a whole pixel of an image or character without moving the printhead,
25 but also in order to switch between printing and not printing. Droplets which are not supposed to hit the printing surface are deflected and collected by a gutter.

Summary of the Invention

30 An object of the present invention is to provide an alternative and improved method and device for applying a coating on a three dimensionally distributed surface.

Another object of the present invention is to provide a method and a device for contactless application
35 of an image on a three dimensionally distributed surface without notable image deterioration.

Another object of the invention is to provide a method and a device which eliminate the need for masking of an object surface before it is coated.

Yet another object of the invention is to provide a method and a device by means of which it is possible to coat an object surface with particles without spilling particles on ambient surfaces.

For achieving at least some of these and other objects, a method as defined in claim 1 and a device as defined in claim 19 are provided. Preferred embodiments of the invention are defined in the dependent claims.

More particularly, according to the invention, a method for contactless application of a coating on a three dimensionally distributed surface comprises applying electrically charged particles on said surface by guiding each of said particles individually to a predetermined position on said surface by means of an adjustable electric field having flux lines with a longitudinal direction extending through said surface, whereby said particles form said coating on said surface.

As defined herein, "coating" means all types of coating including decoration with an image, a text etc, and varnish or paint of one or several colours.

"Contactless application" of a coating is herein defined as non-impact application wherein the surface is not touched by the application means. The particles which form said coating are instead ejected from the application means into the open air and then hit the surface. Examples of contactless application are inkjet printing, air-brush and other spray-painting.

"Predetermined position on said surface" is herein defined as a position within a particular target area on said surface, wherein the target arean is determined in advance and constitutes as small part area of the surface as allowed by the particle size and the precision of the used equipment.

The particles are thus guided to the surface by means of the electric field in such a way that they follow flux lines of the electric field in their path to said surface. More particularly, the particles strive for travelling in the direction of flux lines of the electric field. Since the flux lines have a longitudinal direction extending through the surface to be coated, the particles will be attracted to the surface and form said coating on the surface.

10 This inventive idea, to guide particles to a surface by means of an electric field in order to apply a coating on the surface, opens up for many possibilities to achieve high precision coating or decoration of three dimensionally distributed surfaces. For example, the
15 aforementioned problem with image deterioration, due to the inclination of the surface in relation to the printhead, may be reduced since the flux lines of an electric field may extend approximately perpendicular in relation to the surface, despite that the surface is
20 inclined in relation to the printhead. Thus, the particles may impinge on the surface approximately perpendicularly so that they are not thinly spread out on the surface, which would cause image degradation resulting in a blurred image. Further, as a consequence
25 of this advantage, the need for advanced positioning mechanics decreases since the printhead must not necessarily be positioned in parallel with the surface in order to achieve high precision printing and avoid image degradation.

30 By guiding the particles in an electrically charged state to the surface by means of an electric field, some physical laws may be taken advantage of when for example a printhead with multiple ejection nozzles is used. For the first, equally charged particles will mutually
35 repulse each other. For the second, since different flux lines of the electric field do not cross each other, particles ejected from adjacent ejection nozzles will

adopt separate, non-crossing paths towards the surface. Because of these physical laws, the risk that particles ejected from adjacent ejection nozzles collide is minimal.

5 In an alternative embodiment, a magnetic field is used instead of, or in combination with, said electric field in order to guide particles to a predetermined position on said surface. If a magnetic field is applied, which has magnetic flux lines with a longitudinal
10 direction extending through the surface to be coated, and the particles comprise a magnetic material, the particles will be attracted to said surface.

According to one embodiment of the invention, said electric field is applied such that at least some of its
15 flux lines cross said surface. In that way, the particles will follow these at least some flux lines until they impinge onto the surface.

According to another embodiment of the invention, said longitudinal direction of said flux lines extend
20 through said surface at an angle in the interval between 60° and 120°. If the angle between the flux lines and the surface is kept within this interval, image degradation due to inclined impact of particles on the surface may be considered insignificant. However, there are many other
25 factors, such as particle size, material characteristics etc, that will influence on the image quality.

In another embodiment, the method further comprises adjustment of the distribution of said electric field in order to control the positions in which said particles
30 are applied on said surface. There are several ways in which the distribution of the electric field may be adjusted, and these ways may be used in order to control where on the surface the particles are applied.

In another embodiment of the invention, the method
35 further comprises adjustment of the relative positions of a means for ejecting said particles and said surface in

order to control the positions at which said particles are applied on said surface.

In yet another embodiment of the invention, the method further comprises adjustment of the relative motion of a means for ejecting said particles and said surface in order to control the positions at which said particles are applied on said surface. Not only the relative positions of the surface and the means for ejecting said particles may be considered in controlling the positions at which said particles are applied on the surface, but also their relative motion.

In another embodiment, said electric field is applied over said surface between an electrode and a means for ejecting said particles.

In a specific embodiment, said electrode is formed by an object comprising said surface. Thus, an electric potential which attracts said particles is applied directly to the surface.

In another specific embodiment, said surface is arranged between said electrode and said means for ejecting said particles. Thus, in this embodiment an electric potential which attracts said particles is applied to a separate electrode. This electrode may be positioned behind the surface in relation to the means for ejecting said particles.

In yet another specific embodiment, the method further comprises moving the position of said electrode in relation to the position of said surface in order to control the positions in which said particles are applied on said surface.

In one embodiment of the invention, said particles are applied in such positions on said surface as to form a predetermined pattern. This may e.g. be achieved in a manner corresponding to the way in which a predetermined image is printed on a paper by a common inkjet printer.

In another embodiment, said particles are in the form of viscous droplets. The viscosity may for example

be in interval 5 to 25 cP. One advantage with this is that viscous droplets may easily adhere to the surface.

In another embodiment, said droplets comprise ink. As defined herein, ink means any printable material which at a given printing temperature is viscous and may be ejected from a printhead and adhere to a surface. The ink may be pigmented or have some other desired feature, such as having a varnishing effect, being reflective, being abrasion resistant, being fire resistant etc.

10 In yet another embodiment, said particles comprise ink.

In yet another embodiment, said particles are applied by means of inkjet printing. Prior art from the area of inkjet printing may advantageously be used to implement the present invention. For example, inkjet technologies provide high precision positioning of the particles on the surface to be coated.

According to another embodiment of the invention, said coating is an image.

20 According to another embodiment, the method further comprises

starting from image information representing said image, and information representing said surface, transforming said image information into a compensated image information, and

transferring said image in accordance with said compensated image information to said surface by means of contactless application.

Said image information representing said image may be in the form of a data file, e.g. a bitmap file, or other information structure from which information about the image may be extracted. Said information representing said surface may also be in the form of a data file or other information structure.

35 An image printed contactlessly from one direction on a three dimensionally distributed surface will be more or less deteriorated on all those parts of the surface that

are inclined in relation to the printhead. This image deterioration consists partly of image degradation as mentioned above, but also of image distortion. Image distortion is due to that the space between pixels of the image on the surface is increased because of the inclination. In other words, the image distortion is due to nonuniform stretching of the image when applied on the 3D surface.

According to this embodiment, the distortion may be eliminated by compensating the image for the distortion before applying it on the surface. The image is herein via said compensated image information transformed into a compensated state in which the image is distorted so to say in "reversed directions" as compared to the distortion resulting by the shape of the surface. Hence, when the compensated image is applied on the surface, the image will be "un-distorted" by the shape of the surface.

According to yet another embodiment, said image information is transformed such that distortion in the form of non-uniform stretching of said image on said surface is reduced.

Further in accordance with the present invention, a device is provided, comprising means for ejecting electrically charged particles, and an electrode for forming an electric field between the electrode and said means for ejecting said particles, wherein said electric field has flux lines with a longitudinal direction extending through said surface in order to guide said particles to said surface so that they form said coating.

According to one embodiment of the invention, said means for ejecting said particles is arranged to eject said particles in a direction essentially towards said surface.

According to another embodiment of the invention, said device further comprises a control means being arranged to adjust said electric field in order to

control the positions in which said particles are applied on said surface.

In another embodiment of the invention, said control means is further arranged to control ejection of said particles by said means for ejecting said particles.

In another embodiment, said control means is further arranged to control the position of said surface in relation to said means for ejecting said particles in order to control the positions in which said particles are applied on said surface.

In yet another embodiment, said control means is further arranged to control the motion of said surface in relation to said means for ejecting said particles in order to control the positions in which said particles are applied on said surface.

In another embodiment, said control means further is arranged to control the position of said surface in relation to said electrode in order to control the positions in which said particles are applied on said surface.

In one embodiment of the invention, said device further comprises means for predetermining a pattern according to which said particles are arranged to form said coating.

In another embodiment of the invention, said particles are in the form of viscous droplets.

In another embodiment, said droplets comprise ink.

In yet another embodiment, said particles comprise ink.

In yet another embodiment, said means for ejecting electrically charged particles comprises an inkjet printing nozzle.

According to another embodiment of the invention, said coating is an image.

According to yet another embodiment of the invention, said device further comprises

means for transforming, starting from image information representing said image and information representing said surface, said image information into a compensated image information, and

5 means for transferring said image in accordance with said compensated image information to said surface by means of contactless application.

Brief Description of the Drawings

10 The present invention will now be described in more detail with reference to the accompanying drawings, in which

Fig. 1 is a schematic view of one embodiment of a device according to the invention, illustrating the basic
15 principle of the invention;

Fig. 2 is a schematic view of another embodiment of a device according to the invention, which embodiment is an alternative to the one shown in Fig. 1 and also illustrates the basic principle of the invention;

20 Fig. 3 is a schematic perspective view of another embodiment of a device according to the invention, illustrating means for controlling the relative positions and motion of a surface to be coated and a printhead;

Fig. 4 is a schematic perspective view of another
25 embodiment of a device according to the invention, illustrating means for controlling the position of a surface to be coated in relation to both an electrode and a printhead;

Fig. 5 is a schematic view of an embodiment of a
30 device according to the invention, illustrating coating of a "tricky" surface.

Fig. 6 is a schematic perspective view of a part of an embodiment of a device according to the invention comprising multiple ejection nozzles;

35 Fig. 7a is a schematic perspective view of a decorated cup;

Fig. 7b is a schematic view illustrating decoration of the cup shown in Fig. 7a using a device according to the invention;

Fig. 8 is a schematic perspective view illustrating coating of a mobile phone shell using a device according to the invention;

Fig. 9 is a schematic perspective view illustrating coating of a part of a surface using a device according to the invention;

Fig. 10 is a schematic view of another embodiment of a device according to the invention.

Detailed Description of Preferred Embodiments

Fig. 1 shows an embodiment of a device according to the invention which comprises a means for ejecting electrically charged particles, here in the form of a printhead 10, and an electrode 11 for forming an electric field 12 between the electrode 11 and the printhead 10.

The means for ejecting electrically charged particles may be in the form of a printhead of an inkjet printing device, but also other techniques by means of which it is possible to individually apply an electrically charged particle on a surface may be used.

The printhead 10 comprises an ejection nozzle 13 which is arranged to eject the electrically charged particles towards a three dimensionally distributed surface 14 to be coated. The electrically charged particles may have been charged e.g. by means of charge electrodes (not shown) or by means of electron radiation (neither shown) before they are ejected from the ejection nozzle 13.

The electrode 11 may be in the form of a sphere, as in this embodiment, or a cylinder, or have any other shape which is suitable for a specific shape of a surface to be coated.

The electric field 12 is established as a result of a difference in electric potential between, in this

embodiment, the printhead 10 and the electrode 11. In Fig. 1, this is illustrated by a potential V1 of the printhead 10 and another different potential V2 of the electrode 11. If the potential V2 is higher than the
5 potential V1, the electrically charged particles should be negatively charged so that they are attracted by the electrode 11.

In this embodiment, the electrically charged particles are in the form of electrically charged ink
10 droplets 15.

The ink may be water-based or oil-based, solvent-based or UV-curable. It may also be an ink which changes phase from solid to liquid as a result of heating before it is ejected from the printhead. The ink may be
15 pigmented or have some other desired feature, such as having a varnishing effect, being reflective, being abrasion resistant, being fire resistant etc.

When the three dimensionally distributed surface 14 of an object is to be coated, the electric field 12 is
20 applied over the surface 14 so that flux lines of the electric field 12 cross the surface 14. In most cases, this means that the electrode 11 is placed behind the surface 14 in relation to the printhead 10. The ejection nozzle 13 of the printhead 10 then ejects the
25 electrically charged ink droplets 15 towards the surface 14. The ink droplets 15, being attracted by the electrode 11, strive for travelling in the direction of flux lines of the electric field 12. Since the flux lines cross the surface 14, the ink droplets 15 will impinge on the
30 surface 14 and together form a coating. Thus, the ink droplets 15 are guided to the surface 14 by means of the electric field 12.

Since the ink droplets 15 are guided by the electric field 12 towards the surface 14, the ejection nozzle 13
35 must not necessarily be directed strictly towards the surface 14. It is enough that the ink droplets 15 are ejected in a direction essentially towards the surface

14, i.e. the ejection nozzle 13 may point towards a position slightly beside the surface 14.

By adjusting the electric field 12, for example by changing the strength of it or by moving the printhead 10 in relation to the surface 14, different parts of the surface 14 may be coated with ink droplets 15.

The actual positions in which the ink droplets 15 will impinge on the surface 14 may be pre-determined by means of "trial and error". This could for example be done by applying the electric field 12 over a "test" surface 14, and then, for each position of the surface 14 to be coated, perform "test" coating in order to determine a good combination of the relative positions between the printhead 10, the electrode 11 and the surface 14 to be coated, and the strength of the electric field 12. The determined combination for each surface position may be stored in a data base so that a whole "coating session" for a specific type of coating surface may be pre-programmed and performed automatically for each following item with identical surface to be coated.

Alternatively, or additionally, the actual positions in which the ink droplets 15 will impinge on the surface 14 may be pre-determined by means of simulation in a computer program.

The ejection of the ink droplets 15 may be performed in different ways. One common method to eject ink droplets is called "continuous inkjet", wherein a continuous stream of ink droplets are ejected towards the surface. Another common method to eject ink droplets is called "drop on demand", wherein droplets are ejected only when needed.

In the embodiment shown in Fig. 1, the electric field 12 is established between the printhead 10 and the electrode 11. In fact, as long as the ink droplets, being ejected from the printhead, are attracted by the electrode, the actual points between which the electric field is established is optional. Hence, the electric

field may instead of extending from the printhead extend from another point in the neighbourhood of the printhead.

Further, the electrode may, instead of being a separate electrode being placed somewhere behind a surface to be coated, be formed by the object itself of which the surface to be coated is a part.

Such an alternative embodiment is shown in Fig. 2, where an electric field 22 is established between a printhead 20 and an object 21 comprising a surface 24 to be coated. In this embodiment, a potential V1 is applied to the printhead 20 and another potential V2 is applied directly to the object 21. Thereby, electrically charged ink droplets 25 ejected from an ejection nozzle 23 of the printhead 20 are attracted to the surface 24 and will strive for travelling in the direction of flux lines extending from the surface 24, until they impinge on the surface 24.

In Fig. 3 is shown an embodiment of a device according to the invention comprising a means for controlling the relative positions and motion of a surface to be coated and a printhead. This "control means" may be in the form of any proper digital or analogue control device. In Fig. 3, the positions on a surface 34 in which ink droplets 35 ejected from an ejection nozzle 33 of a printhead 30 are controlled by means of a control means 36.

Irrespective of where the printhead 30 is positioned in relation to the surface 34, an electric field 32 established between the printhead 30 and an electrode 31, in Fig. 3 placed behind the surface 34 in relation to the printhead 30, will always have flux lines crossing the surface 34. Thereby, the electrically charged ink droplets 35 will be attracted towards the surface 34.

In Fig. 3, the position of the printhead 30 in relation to the surface 34 may be changed within one or two degrees of freedom (movement in one plane). Other embodiments, for more precision demanding applications,

may allow movement of the printhead within three degrees of freedom (several planes in space).

Fig. 4 shows another embodiment of a device according to the invention, where also the position of an electrode 41 in relation to the position of a surface 44 to be coated and a printhead 40 may be changed. The positions of the printhead 40 and the electrode 41 are controlled by means of a control means 46. Movement of the electrode 41 in relation to the surface 44, in combination with movement of the printhead 40, adds further possibilities to adjust the distribution of an electric field 42 established between the printhead 40 and the electrode 41.

Fig. 5 shows the possibility to apply a coating on a surface 54 which is parallel to the direction in which the ejection nozzle 53 of a printhead 50 points and ejects electrically charged ink droplets 55. By positioning the printhead 50 and an electrode 51 in proper positions, an electric field 52 between the printhead 50 and the electrode 51 may cross the surface 54 at a tolerated angle, so that the ink droplets 55 guided by the electric field 52 are not thinly spread out on the surface 54 when they impinge on it.

It is possible to adjust the electric field 52 so that the flux lines cross the surface 54 at a tolerated angle in the interval between 60° and 120°. Note that the flux lines only need to have an angle within this interval in the immediate adjacency of the surface 54. Further away from the surface the flux lines may bend towards another angle in relation to the surface 54. Note also that a crossing angle within this interval not excludes that the electric field ends in an object comprising the surface 54, nor that the flux lines continue on the other side of the surface in relation to the printhead.

When a surface to be coated instead is perpendicular to the direction in which the ejection nozzle 53 of the

printhead 50 points, or just is slightly inclined, it might be so that the best impinge angle against the surface would be achieved if the ink droplets follow a straight line in the direction of the ejection nozzle 53 towards the surface. In such a case, coating may be performed with the electrode 51 being uncharged.

In Fig. 6 is shown a part of an embodiment of a device according to the invention where a printhead 60 comprises multiple, in this case four, ejection nozzles 63. The different ejection nozzles 63 may e.g. eject ink droplets 65 of different colours.

Fig. 7a shows a cup which is decorated with a flower. Such a decoration may be printed on a cup or another object by means of a device according to the invention. Decoration of the cup shown in Fig. 7a by means of an embodiment of a device according to the invention is shown in Fig. 7b. As illustrated, ink droplets 75 are guided to the outer surface 74 of the cup by means of an electric field 72 which is established between a printhead 70 and an electrode 71 inside the cup. A decoration pattern may be pre-programmed in a control means of the device in a similar way as ordinary inkjet printers are pre-programmed in order to print a text or a decoration on a paper.

Fig. 8 shows coating of a mobile phone shell 84 by means of a device according to the invention. Usually, product parts like mobile phone shells are coated using some spray-paint technique. However, a problem with such techniques is that not only the shell is painted, but also its environment. In this respect, a device according to the invention is advantageous. For the first, the ink droplets 85 are guided to the shell by an electric field 82 which reduces the risk that the ink droplets 85 fall somewhere else than on the shell 84. For the second, the invention may take advantage of all the common inkjet printing techniques such as high precision positioning of a printhead 80 in relation to the shell 84 and the

possibility to choose "not to print" in the holes of the shell 84.

Fig. 9 illustrates another advantage of coating by means of a device according to the invention in relation to coating by means of spray-painting. While spray-painting in different colours of a device requires masking, printing in different colours by using a device according to the invention may be performed with high precision so that masking is not required.

Fig. 10 shows another embodiment of a device according to the invention which, just like the embodiment shown in Fig. 1, comprises a means for ejecting electrically charged particles, here in the form of a printhead 100, and an electrode 101 for forming an electric field 102 between the electrode 101 and the printhead 100. By adjusting the electric field 102, by changing the strength of it or by moving the printhead 100 in relation to the surface 104 to be printed, different parts of the surface 104 may be coated with ink droplets 105.

The device shown in Fig. 10 further comprises a computing device, here in the form of a personal computer (PC) 106 connected to an inkjet printer comprising the printhead 100, a means for reading a test pattern from the surface 104, here in the form of a video camera 107 with a frame grabber card which is also connected to the PC 106, and one or more mirrors 108. Instead, or in addition to, the video camera 107 a digital camera may be used.

The printhead 100 is in this embodiment first used for applying a two dimensional test pattern on the surface 104. This test pattern may for example comprise black coordinate points arranged in a bar pattern.

The test pattern is then read from the surface by means of the video camera 107 into the PC 106. The purpose of printing a test pattern onto the surface 104 is to determine the distortion of an image printed on the

surface 104 due to the electric field and the inclination of the surface 104 in relation to the printhead 100. If the printed test pattern is unfolded into a two dimensional plane, this distortion may be seen as

5 displacements of the printed, unfolded coordinate points in relation to the original coordinate points in the two dimensional plane. In order to unfold, or more specifically elastically unfold, the test pattern into the two dimensional plane, the mirror 108 may be used. By

10 inclining the mirror 108 45° in relation to a top flat part of the surface 104, one side of the surface 104 may be unfolded into the same two dimensional plane as the top flat part lies in. This simple unfolding technique only works for simple three dimensional surface shapes.

15 If the shape of the surface is more complicated, it may for example be scanned and then modelled and unfolded in a computer program.

The distortion of the test pattern is determined in a computer program. When this is made, a compensating

20 pattern is calculated which compensates for the distortion. This is made by moving the original test pattern coordinates in the opposite directions compared to the distortion directions.

By means of the compensating pattern, an image that

25 one wishes to print on the surface 104 may be transformed into a compensated state so that image distortion is reduced. This transformation may for example be done by means of an interpolation method.

A device according to the invention may also

30 comprise other guiding electrodes than the ones shown in the illustrated examples. Further, magnetic fields may also be used in combination with electric fields in order to guide electrically charged particles to correct positions on a surface to be coated.

35 The present invention is applicable in a wide variety of branches and industries. A few examples are printing or decoration of household, electronics, toys,

sport articles, clothes, fashion articles, and labels on packages.

It is to be understood that modifications of the above described devices and methods can be made by people
5 skilled in the art without departing from the spirit and scope of the invention.

11
12
13
14
15
16
17
18
19
20

20
CLAIMS

1. A method for contactless application of a coating on a three dimensionally distributed surface, said method comprising
5 applying electrically charged particles on said surface by
 guiding each of said particles individually to a predetermined position on said surface by means of an adjustable electric field having flux lines with a
10 longitudinal direction extending through said surface, whereby said particles form said coating on said surface.
2. A method according to claim 1, wherein said
15 electric field is applied such that at least some of its flux lines cross said surface.
3. A method according to claim 1 or 2, wherein said longitudinal direction of said flux lines extend through said surface at an angle in the interval between 60° and
20 120°.
4. A method according to any one of the preceding claims, further comprising
 adjusting the distribution of said electric field in
25 order to control the positions at which said particles are applied on said surface.
5. A method according to any one of the preceding claims, further comprising
30 adjusting the relative positions of a means for ejecting said particles and said surface in order to control the positions at which said particles are applied on said surface.
- 35 6. A method according to any one of the preceding claims, further comprising

adjusting the relative motion of a means for ejecting said particles and said surface in order to control the positions at which said particles are applied on said surface.

5

7. A method according to any one of the preceding claims, wherein said electric field is applied over said surface between an electrode and a means for ejecting said particles.

10

8. A method according to claim 7, wherein said electrode is formed by an object comprising said surface.

9. A method according to claim 7, wherein said surface is arranged between said electrode and said means for ejecting said particles.

10. A method according to any one of claims 7 to 9, further comprising
moving the position of said electrode in relation to the position of said surface in order to control the positions in which said particles are applied on said surface.

11. A method according to any one of the preceding claims, wherein said particles are applied in such positions on said surface as to form a predetermined pattern.

12. A method according to any one of the preceding claims, wherein said particles are in the form of viscous droplets.

13. A method according to claim 12, wherein said droplets comprise ink.

14. A method according to any one of the preceding claims, wherein said particles comprise ink.

15. A method according to any one of the preceding
5 claims, wherein said particles are applied by means of inkjet printing.

16. A method according to any one of the preceding claims, wherein said coating is an image.

10

17. A method according to claim 16, wherein the method further comprises

starting from image information representing said image, and information representing said surface,
15 transforming said image information into a compensated image information, and

transferring said image in accordance with said compensated image information to said surface by means of contactless application.

20

18. A method according to claim 17, wherein said image information is transformed such that distortion in the form of non-uniform stretching of said image on said surface is reduced.

25

19. A device for applying a coating on a three dimensionally distributed surface, said device comprising means for ejecting electrically charged particles, and

30 an electrode for forming an electric field between the electrode and said means for ejecting said particles, wherein said electric field has flux lines with a longitudinal direction extending through said surface in order to guide said particles to said surface so that
35 they form said coating.

20. A device according to claim 19, wherein said flux lines cross said surface.

21. A device according to claim 19 or 20, wherein
5 said means for ejecting said particles is arranged to eject said particles in a direction essentially towards said surface.

22. A device according to any one of claims 19 to
10 21, further comprising
a control means being arranged to adjust said electric field in order to control the positions in which said particles are applied on said surface.

23. A device according to claim 22, wherein said
15 control means further is arranged to control ejection of said particles by said means for ejecting said particles.

24. A device according to claim 22 or 23, wherein
20 said control means further is arranged to control the position of said surface in relation to said means for ejecting said particles in order to control the positions in which said particles are applied on said surface.

25. A device according to any one of claims 22 to
24, wherein said control means further is arranged to control the motion of said surface in relation to said means for ejecting said particles in order to control the positions in which said particles are applied on said
30 surface.

26. A device according to any one of claims 22 to
25, wherein said control means further is arranged to control the position of said surface in relation to said
35 electrode in order to control the positions in which said particles are applied on said surface.

27. A device according to any one of claims 19 to 26, further comprising means for predetermining a pattern according to which said particles are arranged to form said coating.

5

28. A device according to any one of claims 19 to 27, wherein said particles are in the form of viscous droplets.

10

29. A device according to claim 28, wherein said droplets comprise ink.

30. A device according to any one of claims 19 to 29, wherein said particles comprise ink.

15

31. A device according to any one of claims 19 to 30, wherein said means for ejecting electrically charged particles comprises an inkjet printing nozzle.

20

32. A device according to any one of claims 19 to 31, wherein said coating is an image.

33. A device according to claim 32, further comprising

25

means for transforming, starting from image information representing said image and information representing said surface, said image information into a compensated image information, and

30 means for transferring said image in accordance with said compensated image information to said surface by means of contactless application.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108

ABSTRACT

A method for contactless application of a coating on a three dimensionally distributed surface. The method comprises application of electrically charged particles on said surface by guiding each of said particles individually to a predetermined position on said surface. The guiding is made by means of an adjustable electric field having flux lines with a longitudinal direction extending through said surface, whereby said particles form said coating on said surface. A device for applying a coating on a three dimensionally distributed surface comprises means for ejecting electrically charged particles, and an electrode for forming an electric field between the electrode and said means for ejecting said particles. Said electric field has flux lines with a longitudinal direction extending through said surface in order to guide said particles to said surface so that they form said coating.

20

25

30 To be published: Fig. 1

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30

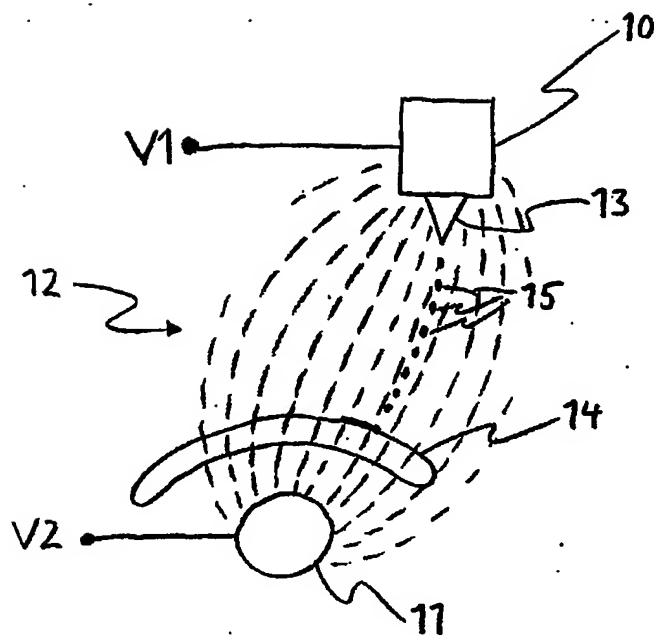


Fig. 1

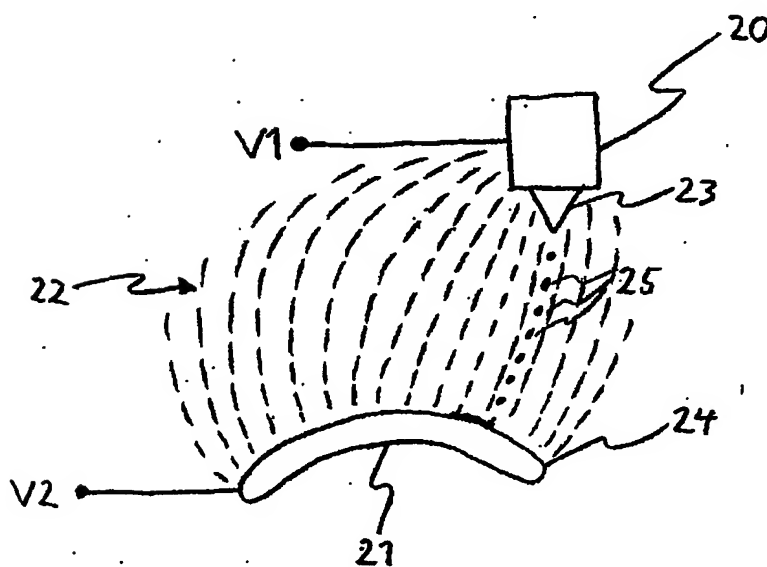


Fig. 2.

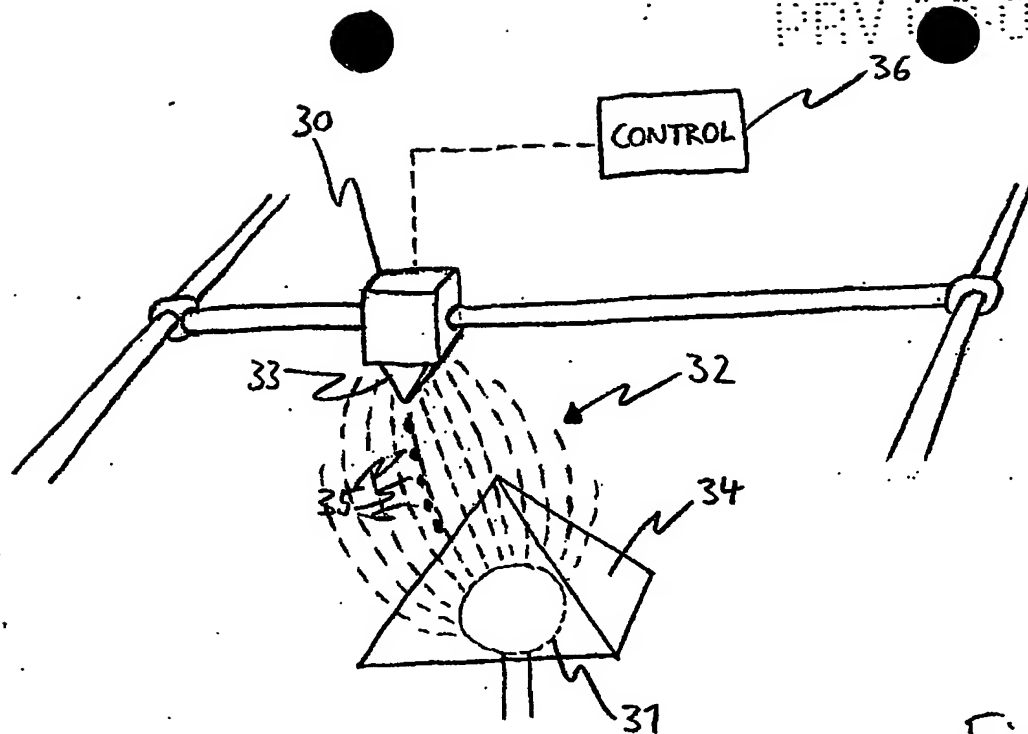


Fig. 3

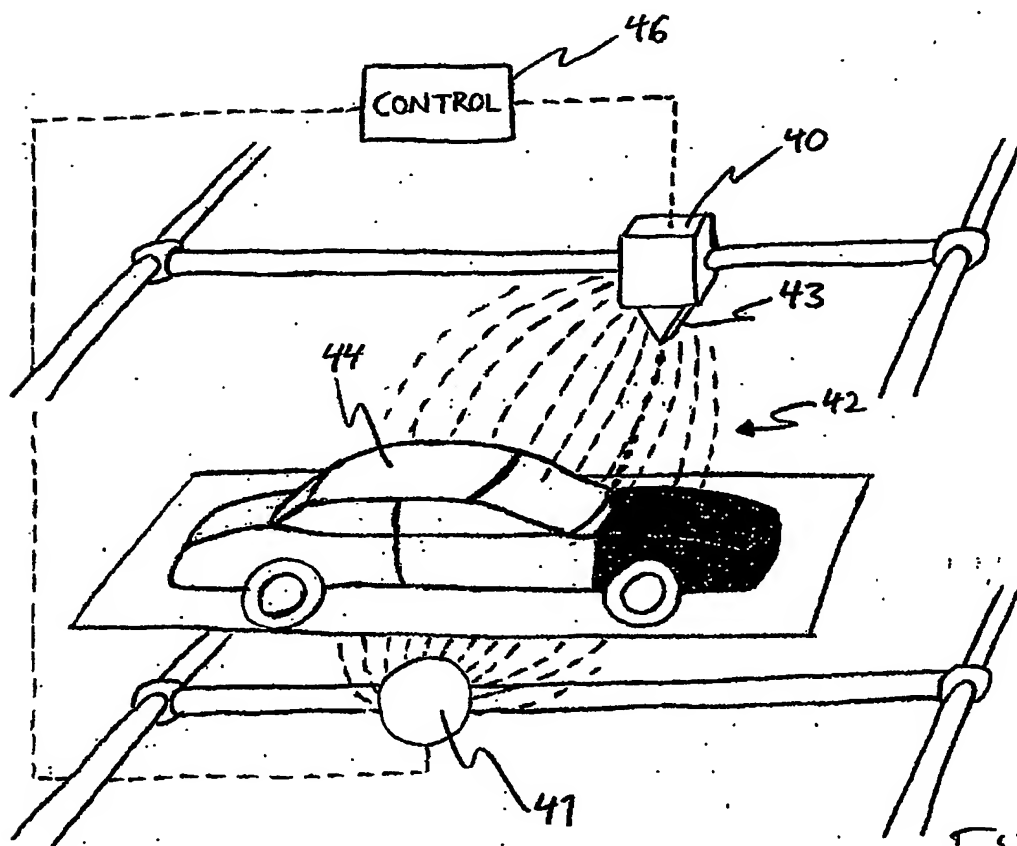


Fig. 4

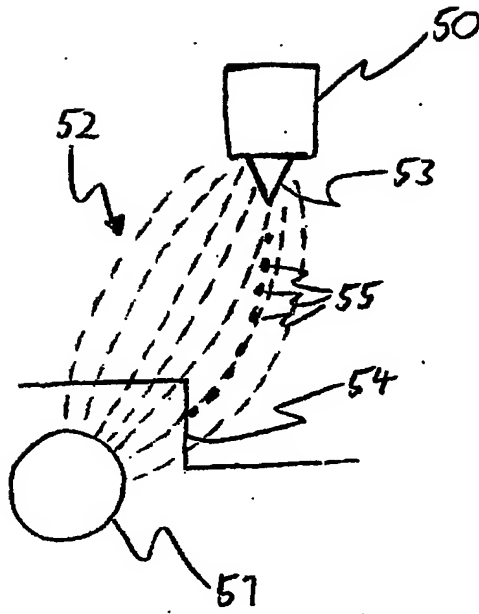


Fig. 5

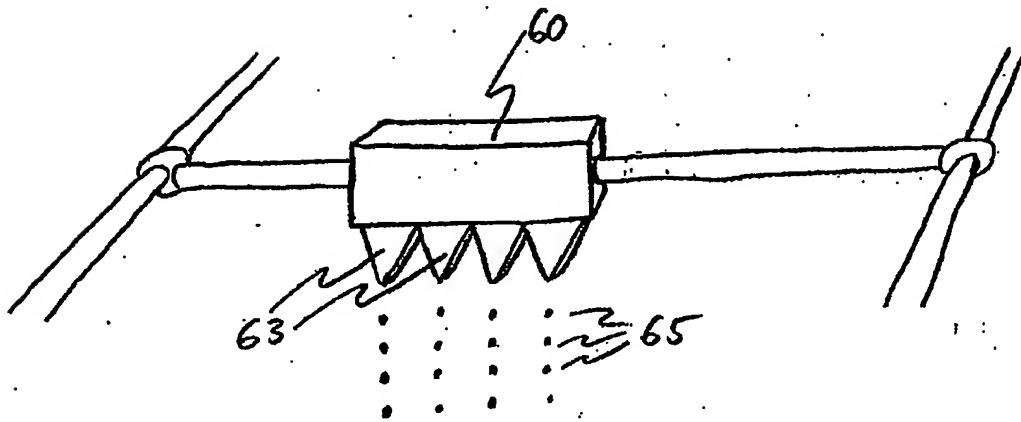


Fig. 6

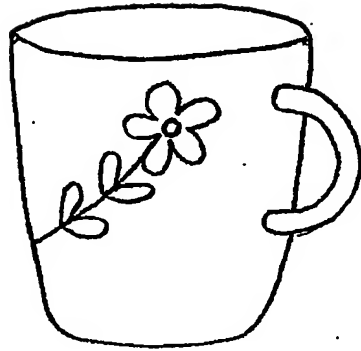


Fig. 7a

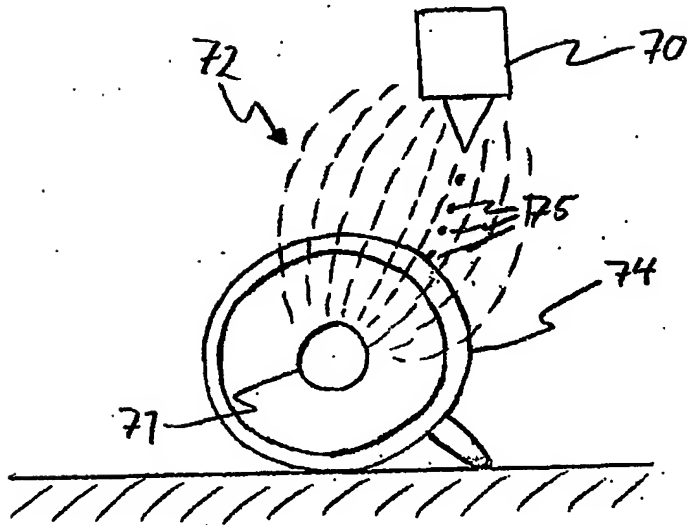




Fig. 7b






Fig. 10